

IN31202 INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions, as you may need them at a later date.

CAUTION

WARNING: Risk of Fire. Consult a qualified electrician to ensure correct branch circuit conductor. Min 90°C supply conductors.

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

GENERAL


All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

ASSEMBLY AND INSTALLATION

1. Carefully unpack and lay out the parts as shown in illustration and read all instructions before starting.

- 2.Attach the mounting bar (7) to the outlet box by using two box screws (8).
- 3. Weave the power wire (14) through the steel machine (11), canopy (10), and mounting bar (7).
- 4.Determine needed length of power wire (14) to achieve desired fixture height. Secure the steel machine (11) using plastic screw (12).
- 5. Pull out the outlet wire and ground wire from the outlet box (1). Make wire connections (5).
- --Ribbed wire (w/o marking) from light to White wire (2) from power source
- --Smooth wire (w/o marking) from light to Black wire (3) from power source
- --Loop the ground wire (4) to cross bar (7) with a ground screw (6)
- 6.Attach the canopy (10) to the mounting bar (7) by inserting the fixture mounting screws (9), and then secure it with two ball nuts (13).
- 7.Screw the bulb (not included) into the socket ring.

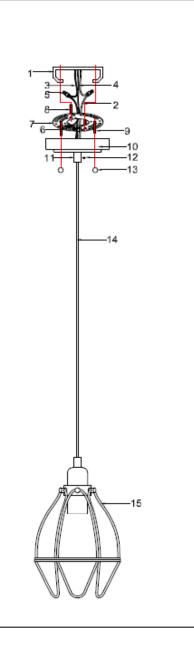

- 1 OUTLET BOX
- 2 WHITE WIRE
- 3 BLACK WIRE
- 4 GROUND WIRE
- 5 WIRE CONNECTOR
- 6 GROUND SCREW
- 7 MOUNTING BAR
- 8 BOX SCREW
- 9 MOUNTING SCREW
- 10 CANOPY
- 11 STEEL MACHINE
- 12 PLASTIC SCREW
- 13 BALL NUT
- 14 POWER WIRE
- 15 LAMP BODY