
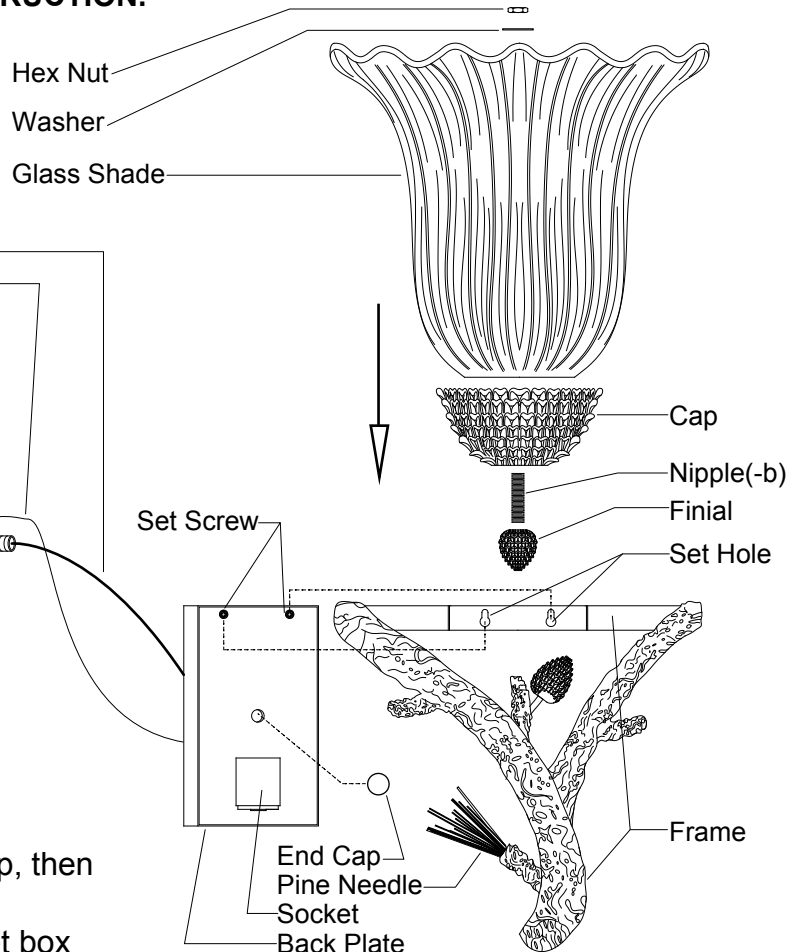
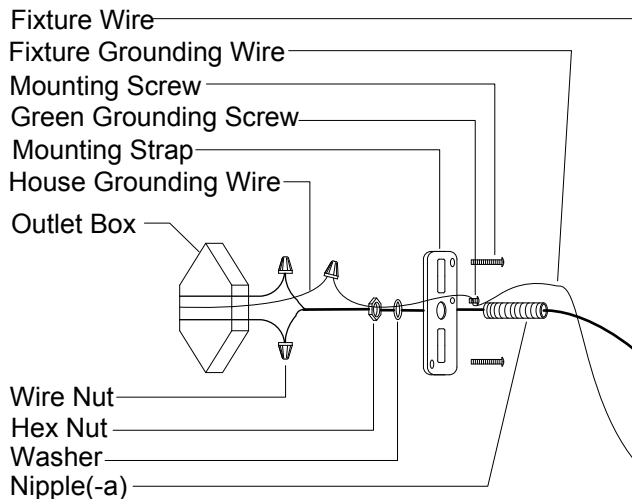


ASSEMBLY AND INSTALLATION INSTRUCTIONS

AS-WSU120

WARNING: BE SURE TO SHUT OFF POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE INSTALLING OR SERVICING THIS FIXTURE.

**NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THIS INSTRUCTION.**

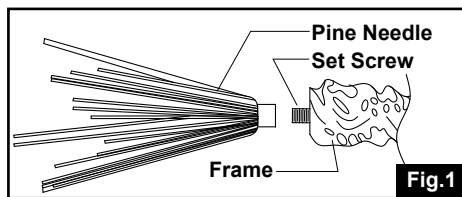

1. Attach nipple(-a) to the mounting strap, then secure it with a washer and hex nut.
2. Attach the mounting strap to the outlet box by using two mounting screws.
3. Pull out the outlet wires and house grounding wire from the outlet box. Make wire connections with wire nuts:
 - The black wire from the light to the black wire from the power source.
 - The white wire from the light to the white wire from the power source.
 - Attach the fixture grounding wire to the mounting strap with the green grounding screw. Then connect it to the house grounding wire with a wire nut.
 Carefully put the wires back into the outlet box.
4. Attach the back plate to the mounting strap by inserting nipple(-a), then secure it with end cap.
5. Screw nipple(-b) into the finial. Then attach the cap and the finial to the glass shade with nipple(-b) through the hole in the cap and the hole in the glass shade, secure them with a metal pad and hex nut.
6. Insert the glass shade assembly into the frame, then attach them to the back plate with the set holes of the frame locating to the set screws of the back plate, and then fasten the set screw.
7. Install a bulb (not included). See relamping label at socket area or packaging for maximum allowed wattage.
8. Secure the pine needle onto the set screw of the frame. (See Fig.1)
9. Turn on the power at the main fuse or circuit breaker box.