
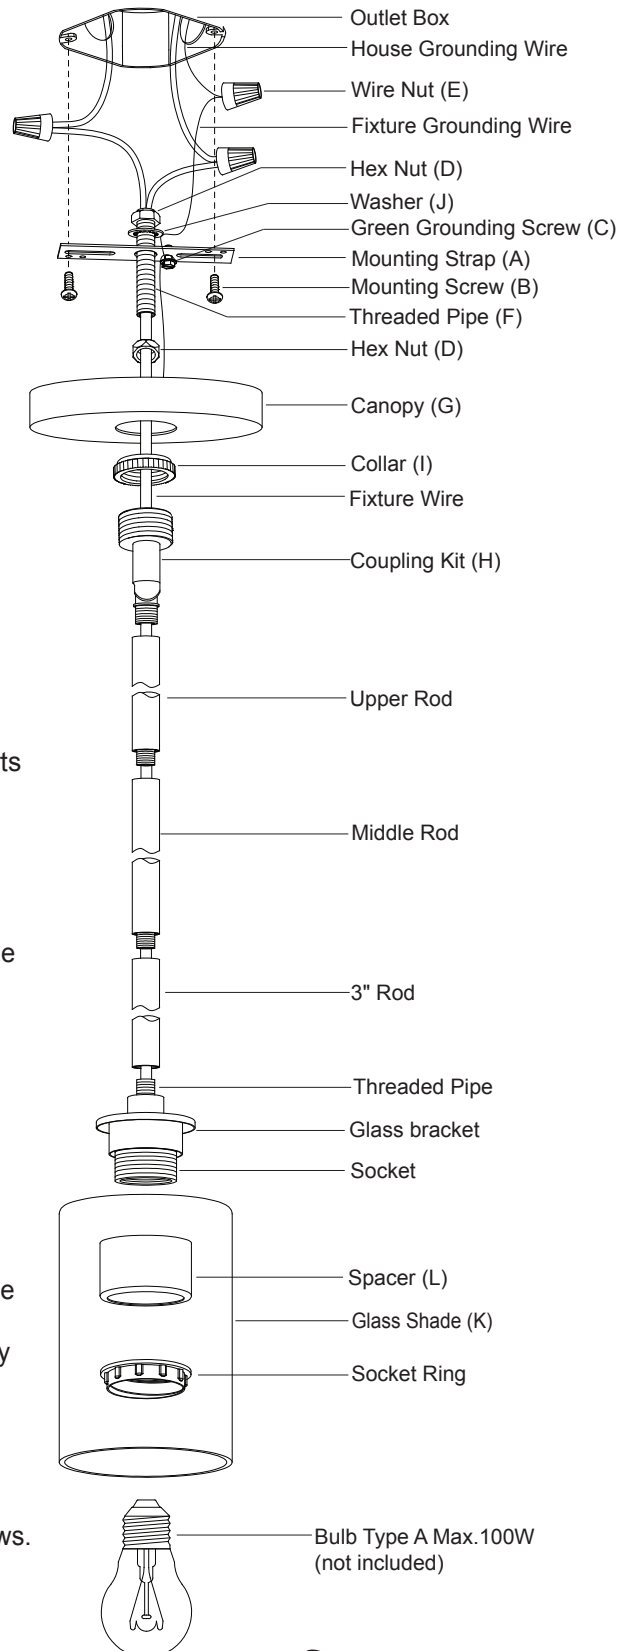


# ASSEMBLY AND INSTALLATION INSTRUCTIONS

P0129 / P0130

**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

**NOTES:** 1. Before installing, consult local electrical codes for wiring and grounding requirements.  
2. READ AND SAVE THESE INSTRUCTIONS.

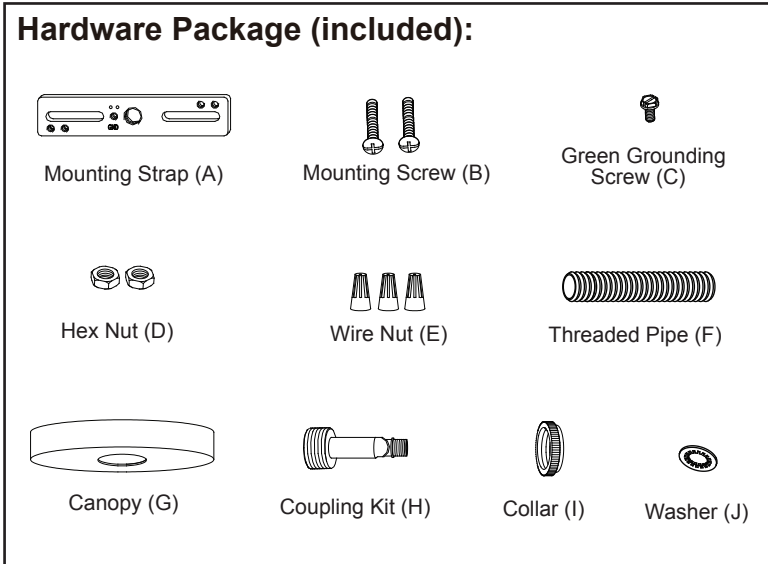

## Assembly Instructions:

Turn off the power at fuse or circuit box.

- Carefully remove the fixture from the carton and check that all parts are included.
- Rod Connections:
  - Thread the fixture wire from the socket through the 3" rod, then secure 3" rod onto glass bracket using threaded pipe.
  - Thread the fixture wire through the middle rod, then secure middle rod onto 3" rod using threaded pipe.
  - Thread the fixture wire through the upper rod, then secure upper rod onto middle rod using threaded pipe.  
**"NOTE: Length adjustable from 12-5/8" to 66-5/8". Use fewer rods if shorter length is desired.**
- Thread the fixture wire through the coupling kit, collar, canopy, then secure the rod assembly to the coupling kit.
- Thread the fixture wire through the hex nut, threaded pipe and mounting strap. Install the hex nut onto one end of the threaded pipe leaving about 3/8" (10mm) thread exposed. Install same end of threaded pipe by screwing into coupling kit, secure threaded pipe by tightening hex nut.
- Attach the threaded pipe to the mounting strap, then secure it with a washer and hex nut.
- Attach the mounting strap to outlet box by using two mounting screws.


7. Pull out the source wires from the outlet box. Make wire connections using wire nuts as follows:
  - Connect the black wire from the fixture to the hot wire (usually black insulation) from the power source.
  - Connect the white wire from the fixture to the neutral wire (usually white insulation) from the power source.
  - Attach the fixture grounding wire (usually bare wire) to the mounting strap with the green grounding screw. Then connect it to the house grounding wire with a wire nut. If your outlet box does not have a house grounding wire, then wrap the fixture grounding wire around the green grounding screw.
 Carefully put the wires back into the outlet box.

8. Attach the canopy to the mounting strap: insert the coupling kit through hole, then secure by tightening collar.

9. Place the glass shade onto the glass bracket, then secure it by tightening the spacer and socket ring.

10. Install bulb (not included). See relamping label at socket area or packaging for maximum allowed wattage.


**11. Angled mounting recommended for a vaulted or angled ceiling. (See Fig. 1)**

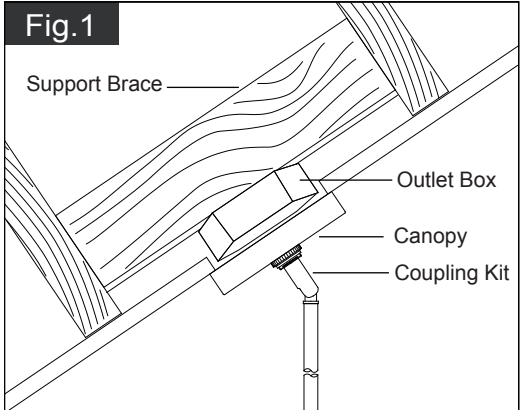

Turn on the power at the main fuse or circuit breaker box.

The following parts are available for re-order if damaged or missing.

 Mounting Strap (A)	 Mounting Screw (B)	 Green Grounding Screw (C)	 Glass Shade (K) (9620FO) (1 PC)	 Spacer (L) (5108PP) (1 PC)
 Hex Nut (D)	 Wire Nut (E)	 Threaded Pipe (F)	 12"Rod (M) (5129RR For H0129) (5125RR For H0130) (4 PCS)	 6"Rod (N) (5128RR For H0129) (5124RR For H0130) (1 PC)
 Canopy (G)	 Coupling Kit (H)	 Collar (I)	 3"Rod (O) (5127RR For H0129) (5123RR For H0130) (1 PC)	
 Washer (J)			 Assembly Kit (5126MM For P0129) (5122MM For P0130) (1 SET)	

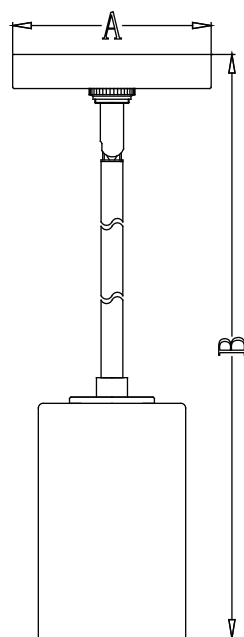

**A: 5"**

**B: 12-5/8~66-5/8"**