


**BELLERIA®**

# FP4320\*\*1-220 Wet-Location Ceiling Fan

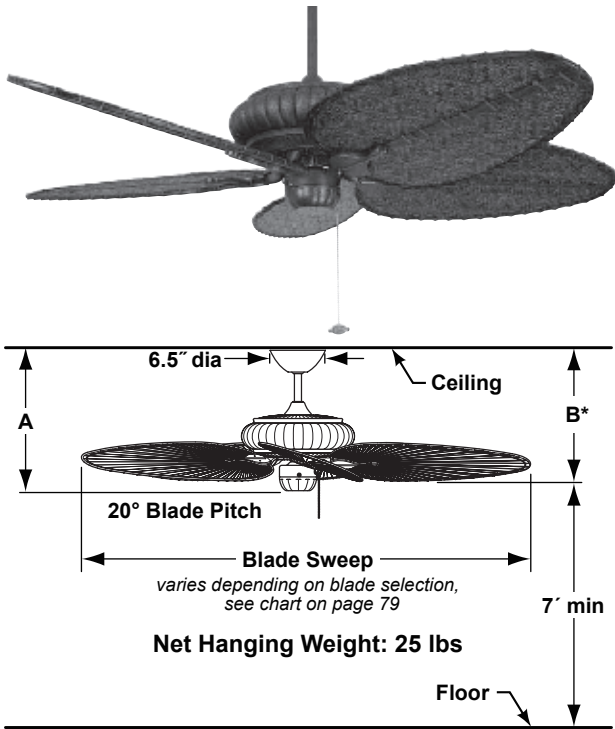

\*Dimension when used with BPD4A blades. Ceiling to blade measurement will vary depending on blade.

Available Finishes	
AZ	Aged bronze
LT	Latte
MW	Matte white
TB	Textured black
TS	Tortoise shell

	A	B*
Fan w/6" downrod	16.30"	15.00"
Fan w/12" downrod	22.30"	21.00"
Fan w/18" downrod	28.30"	27.00"
Fan w/24" downrod	34.30"	33.00"
Fan w/36" downrod	46.30"	45.00"
Fan w/48" downrod	58.30"	57.00"
Fan w/60" downrod	70.30"	69.00"
Fan w/72" downrod	82.30"	81.00"

TUV/GS Efficiency Info (220V)			
Fan Speed	Max RPM	Amps	Watts
High	116	0.22	54
Med	90	0.19	41
Low	65	0.13	22

### INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

### ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 220~240 volts AC, 50Hz, 5 amp circuit.

### MOTOR SPECS:

188 x 25-220 motor is designed for optimal performance with this fan.

### BLADES:

All-weather composite, palm, bamboo, and wood blade sets are available—sold separately. See our catalog or visit [www.fanimation.com](http://www.fanimation.com) for all available blade options.

### CONTROL OPTIONS (Dry Applications Only):

Optional C1-220, C2-220, C3-220 and C6-220 wall controls available—sold separately. Optional TR4WH-220 and CRL8TS-220 remote controls with canopy-style receiver unit available—sold separately. Instructions are provided with each control.

### LIGHTING OPTIONS:

Optional lighting fitters and light kits are available. Lighting fitter FW423-220 is water-sealed and TUL damp location approved. See our catalog or visit [www.fanimation.com](http://www.fanimation.com) for available lighting options.

### DOWNROD OPTIONS:

Fan comes with 1" dia. x 6" long wet-location downrod (DR1-6). Optional wet-location downrods are available in 12", 18", 24", 36", 48", 60" and 72" lengths. Fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 30° and up to 52°. Optional close-to-ceiling kit is available as well-sold separately. Call technical support for more information.

### LOCATION USE:

Rated for dry, damp and wet locations.

Available All-Weather Composite Blades		
Palm leaf	BPP1	Natural - 22" wide oval
Palm leaf-brown	BPP1BR	Painted - 22" wide oval
Palm leaf	BPP4	Natural - 22" narrow oval
Palm leaf-brown	BPP4BR	Painted - 22" narrow oval
Palm leaf-green	BPP4GR	Painted - 22" narrow oval
Woven bamboo	BPD1A	Antique - 22" Wide oval
Woven bamboo	BPD4A	Antique - 22" narrow oval
Woven bamboo	BPD4MW	Matte white - 22" narrow oval
Woven bamboo	BPD5A	Antique - 18" narrow oval
Traditional wood	BPW10CY	Cherry - 20" narrow
Curved-edge wood	BPW20CY	Cherry - 20" narrow
Curved-edge wood	BPW20MH	Mahogany - 20" narrow
Curved-edge wood	BPW20TK	Teak - 20" narrow